

Quality Description, A – Planed

Quality: Lunawood® Thermo-D

Raw Material: Pine (Pinus Sylvestris), Spruce (Picea Abies)

Surface: Planed Installation: Decking

Moisture: 6 % \pm 2 % after production


Tolerances:

Width \pm 0,50 mm Thickness \pm 0,50 mm

- 10 mm, + 30 mm

General Quality Evaluation

- The influence of a single defect is evaluated by looking at the overall quality of the product.
- Board is rejected if its overall look remarkably differs from the general quality requirements.
- Several maximum defects in one product are allowed if the overall look remains acceptable.
- In general 8 cm from the ends of the boars are not sorted. However end matched product are an exception.

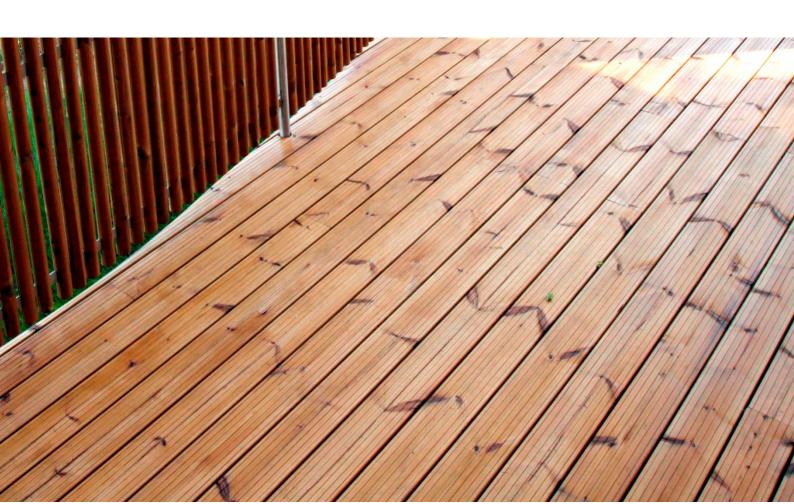



Small knothole (not throughout) on a board is allowed.



Pitch pockets are allowed



Small split of a knot on the edge is allowed.



In general 8 cm from the ends of the boars are not sorted.



Single crack of a knot is allowed.



Small missing knot is allowed.



Small scars may appear.



Small shakes on the surface are allowed.